


CBB61/C61-IV型交流金属化薄膜电容器.....高压 (500-700V)

Type CBB61/C61-IV Metallized film capacitor A.C.....High voltage(500-700V)

CBB61/C61-IV型 交流金属化薄膜电容器

Type CBB61/C61-IV Metallized film capacitor A.C

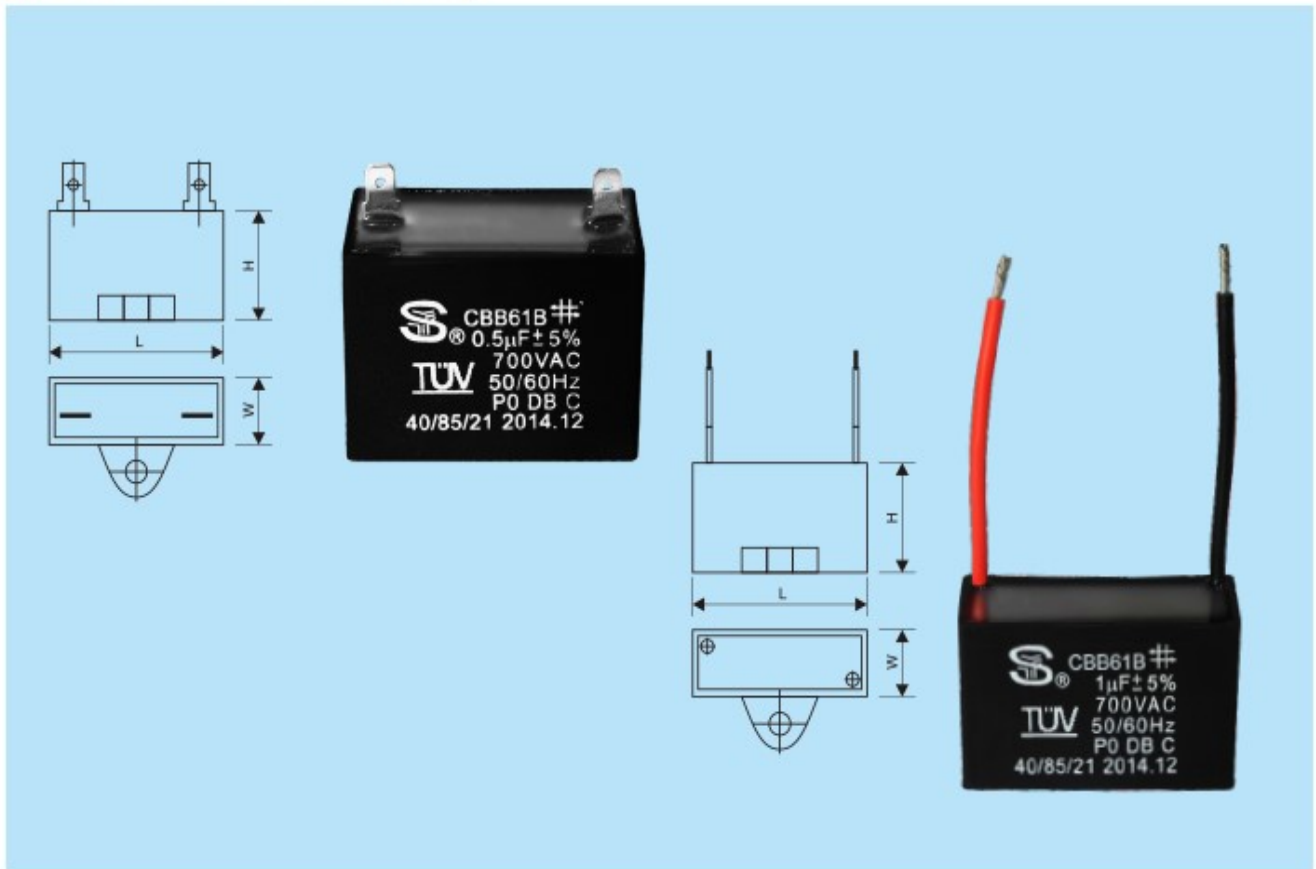

◆ **执行标准**：满足《IEC：60252-1-2011》《UL810-2008》《GB3667.1-2005》标准；

◆ **产品特点**：使用额定电压高，损耗小，电容量稳定，使用安全可靠等特点。

◆ **产品用途**：广泛用于风机、电风扇、除湿机等电器及设备的电机起动运行。

◆ **主要技术参数**：

额定电压：500V.AC-700V.AC

容量偏差：±3%、±5%、±10%

损耗角正切值：tg δ ≤ 0.0025(100Hz)

极间耐压：2Un/5s

极壳耐压：2000V.AC or 2Un+1000VAC

产品认证：TUV、UL、CUL、CQC

稳态过电压：允许1.1Un下长期运行

稳态过电流：允许1.3In下长期运行

优选气候类别：40/70/21 40/85/21 40/105/21

运行等级：C(3000h)

安全等级：P0

Reference Standard: Meet the requirements of standard (IEC:60252-1-2011) (UL810-2008) (GB3667.1-2005)

Product Characteristic: Higher working voltage, low in dissipation, stable capacitance and usage safety and dependable.

Application: They are widely used for draught fan, fan, dehumidifier...etc electrical appliances and equipments start and running.

Technical Specification:

Rated Voltage: 500V.AC-700V.AC

Capacitance Tolerance: ±3%、±5%、±10%

Dissipation factor: tg δ ≤ 0.0025(100Hz)

Voltage Proof (Vt-t): 2Un/5s

Voltage Proof(Vt-c): 2000V.AC or 2Un+1000VAC

Product Certificates: TUV、UL、CUL、CQC

Steady state overvoltage: Permit long term of operation under 1.1Un

Steady state overcurrent: Permit long term of operation under 1.3In

Climate Category: 40/70/21 40/85/21 40/105/21

Class of Operation: C(3000h)

Safety Class: P0

◆CBB61/C61-IV型号常用规格表：（见附表）

CBB61/C61-IV型高压电容器规格表
Type CBB61/C61-IV High-voltage Capacitor specification sheet

电压 尺寸 容量		电压 Voltage								
		500VAC			600VAC			700VAC		
外壳 Case	容量 Capacitance	L	H	W	L	H	W	L	H	W
A/B	0.5	37	22	12	37	22	12	38	27	14.5
C	0.5	37	22	12	37	22	12	36	25	16
A	0.8	38	23	12	38	27	14.5	38	29	18.5
B	0.8	37	24	13.5	38	27	14.5	38	29	18.5
C	0.8	37	24	13.5	36	25	16	38	30	17.5
A/B	1.2	38	27	14.5	38	29	18.5	47	31	19
C	1.2	36	25	16	38	30	17.5	50	30	19.5
A	1.5	38	28	17	48	28	17	47	32	23
B	1.5	38	28	17	48	28	17	47	33	20
C	1.5	38	28	17	41	31	19.5	47	33	20
A/B	1.8	38	29	18.5	47	31	19	47	32	23
C	1.8	38	30	17.5	50	30	19.5	47	32	23
A	2	48	28	17	47	31	19	50	34	23
B	2	48	28	17	47	31	19	47	35	23
C	2	41	31	19.5	50	30	19.5	47	35	23
A	2.2	48	28	17	47	31	19	58	34	22
B	2.2	48	28	17	47	33	20	58	34	22
C	2.2	41	31	19.5	47	33	20	58	34	22
A	2.75	47	33	19	47	32	23	58	38	26
B	2.75	47	31	19	47	35	23	58	38	26
C	2.75	50	30	19.5	47	32	23	58	38	26
A	3	47	33	19	50	34	23	58	38	26
B	3	47	31	19	47	35	23	58	38	26
C	3	50	30	19.5	47	35	23	58	38	26
A	3.5	47	32	23	58	34	22	58	41	29
B/C	3.5	47	33	20	58	34	22	59	42	30
A	4	47	32	23	58	38	26	58	41	29
B	4	47	35	20.5	58	36	23	59	42	30
C	4	47	32	23	58	36	23	59	42	30
A	4.5	50	37	24	58	38	26	59	42	30
B/C	4.5	47	35	23	58	38	26	59	42	30
A/B/C	5	47	37	27	58	38	26	58	43	32
A	5.5	47	37	27	58	41	29	58	48	35
B	5.5	47	37	27	59	42	30	58	48	35
C	5.5	58	36	23	59	42	30	58	48	35
A	6	58	38	26	58	41	29	58	48	35
B/C	6	58	36	23	59	42	30	58	48	35
A/B/C	7.5	58	38	26	59	42	30	58	52	38
A/B/C	8	59	42	30	58	48	35	70	50	62
A/B/C	10	59	42	30	58	52	38	70	50	62
A/B/C	12.5	58	48	35	70	50	62	/	/	/
A/B/C	15	58	52	38	70	50	62	/	/	/
A/B/C	17.5	58	52	38	/	/	/	/	/	/
A/B/C	20	70	50	62	/	/	/	/	/	/
A/B/C	22.5	70	50	62	/	/	/	/	/	/

◆特殊要求可根据用户要求协商制作。Special requirement can be fulfilled at the request of customers.