

# CBB20型电容器系列


## Type CBB20 Series of capacitor A.C

### CBB20型电容器系列

#### Type CBB20 Series of capacitor A.C

- ◆ **执行标准**：满足《UL810-2008》标准。
- ◆ **产品特点**：无感应结构，自愈性能优异，高耐温特性，大容量且尺寸紧凑等特点。
- ◆ **产品用途**：耦合、离合、旁路及定时回路；自动控制系统及讯设备；  
充放电、照明、噪音抑制及频率调制。
- ◆ **主要技术参数**：

**额定电压**：110V.AC-600V.AC                      **稳态过电压**：允许1.1Un下长期运行  
**容量偏差**：±3%、±5%、±10%                      **稳态过电流**：允许1.3In下长期运行  
**损耗角正切值**：tg δ ≤0.0025(100Hz)              **优选气候类别**：40/70/21 40/85/21 40/105/21  
**极间耐压**：1.5Un/5s                                      **安全等级**：P0  
**极壳耐压**：2000V.AC or 2Un+1000VAC  
**产品认证**：UL、CUL

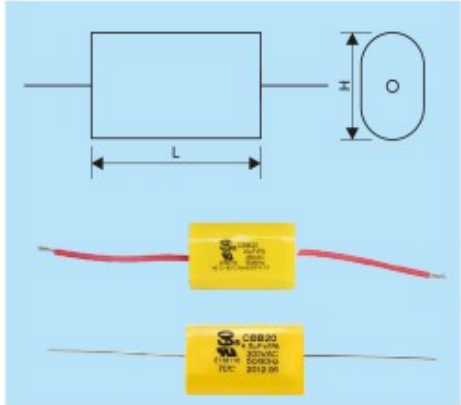

**Reference Standard**:Meet the requirements of standard {UL810-2008}  
**Product Characteristic**:Non-inductive construction, good self-healing performance, high property of moisture resistance, high capacitance value available and compact size..  
**Application**:coupling, decoupling by passing and timing circuit, automatic control system, communication equipment, charging/discharging lighting, noise suppression and frequency modulation.

**Technical Specification**:  
**Rated Voltage**:110V.AC-600V.AC                      **Steady state overvoltage**:Permit long term of operation under 1.1Un  
**Capacitance Tolerance**: ±3%、±5%、±10%                      **Steady state overcurrent**:Permit long term of operation under 1.3In  
**Dissipation factor**:tg δ ≤0.0025(100Hz)                      **Climate Category**:40/70/21 40/85/21 40/105/21  
**Voltage Proof (Vt-t)**: 1.5Un/5s                                      **Safety Class**:P0  
**Voltage Proof(Vt-c)**:2000V.AC or 2Un+1000VAC  
**Product Certificates**:UL、CUL

◆ CBB20型号常用规格表：（见附表）

**CBB20型电容器规格表**  
Type CBB20 Capacitor specification sheet

容量 Capacity	电压 Voltage																				
	250VAC			300VAC			350VAC			400VAC			450VAC			500VAC			600VAC		
	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W
0.5	32	13.5	7	32	15	7	32	11	7	32	11	7	32	15	7	37	16	8	37	17.5	10
0.8	32	12	7	32	15.5	8	32	14.5	8.5	32	14.5	8.5	32	17	9	37	19.5	11	37	21.5	12
1	32	13.5	7	32	15	7.5	32	16.8	9	32	16.8	9	37	17	9	37	20.5	11.5	37	23	14
1.2	32	12	7	32	16	8	37	16.5	8.5	37	16.5	8.5	37	18	10	37	22	12.5	37	24.8	15.5
1.5	32	14	7	37	16	8	37	18.5	9.5	37	18.5	9.5	37	19.5	11.5	37	23.7	14	47	23.5	14
1.8	32	14	8	37	17	9	37	19.5	10.5	37	19.5	10.5	37	20.8	13	37	25	15.8	47	25	15.5
2	32	15	8.5	37	17.5	9.5	37	20.5	11	37	20.5	11	37	21.6	13.5	37	26	16.8	47	26	16.5
2.5	32	17	9	37	19.5	10	37	21	12.5	37	21	12.5	37	23.5	15.5	47	25.6	14.6	47	28	18.8
3	37	17	9	37	20.5	11	37	23	13.8	37	23	13.8	47	23	13.5	47	27	16	47	30	20.8
4	37	18.5	10.5	47	20.5	11	47	22.8	13.5	47	22.8	13.5	47	25.5	16	47	31	18.5	47	34.5	23.5
5	47	18	10	47	21.8	12.5	47	24.7	15	47	24.7	15	47	27.6	18	47	33.7	21	60	34	23
6	47	20	10.5	47	23	13.8	47	26.5	17	47	26.5	17	47	27.5	20	47	37.8	22	60	36.5	25.5
8	47	22	12.5	47	25.5	16	60	26.5	17	60	26.5	17	60	30	20.5	47	42	26	60	41	30
10	60	21.5	12	60	25.5	16	60	29	19.5	60	29	19.5	60	32.7	23	60	41	25.5	60	45	34
12.5	60	23.5	14	60	27.5	18	60	31.5	22	60	31.5	22	60	35.8	26.5	60	44.7	29	60	51.7	35
15	60	25	15.5	60	29.5	20	60	34	24.6	60	34	24.6	60	38.5	29	60	48	32.5	/	/	/
18	60	26.5	17	60	31.5	22	60	36.6	27	60	36.6	27	60	41.7	32	60	51.7	35	/	/	/
20	60	27.5	18	60	32	23.5	60	38	29	60	38	29	60	43.6	34	/	/	/	/	/	/
22.5	60	28.8	19.5	60	34.5	25	60	40	30.5	60	40	30.5	60	47.5	34.9	/	/	/	/	/	/
25	60	30	20.8	60	36	26.7	60	42	32.5	60	42	32.5	60	51	34.9	/	/	/	/	/	/
30	60	33.5	22.5	60	39	29.5	60	47	34.5	60	47	34.5	/	/	/	/	/	/	/	/	/
33	60	34.5	23.5	60	40.5	31	60	50	34.5	60	50	34.5	/	/	/	/	/	/	/	/	/
35	60	33.5	22.5	60	41.5	32	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
40	60	33.5	22.5	60	44	34.5	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/

◆ 特殊要求可根据用户要求协商制作。Special requirement can be fulfilled at the request of customers.