


# CBB80灯具电容器系列

## Type CBB80 Series of capacitor A.C

### CBB80灯具电容器系列

#### Type CBB80 Series of capacitor A.C

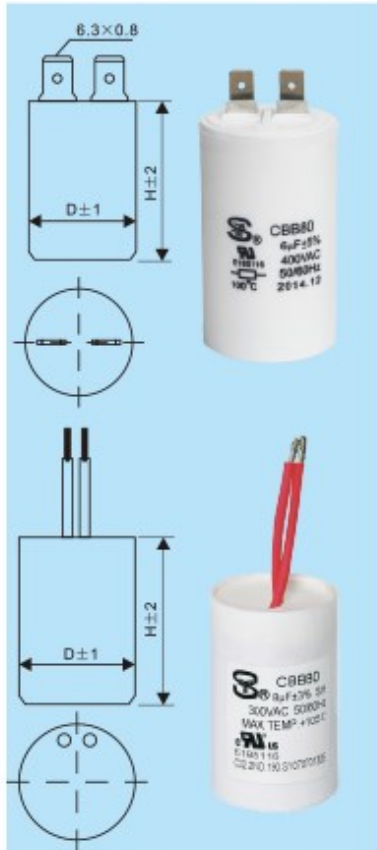

◆ **执行标准**：满足《IEC：60252-1-2011》《UL810-2008》《GB3667.1-2005》标准。

◆ **产品特点**：体积小，内部温升低，使用寿命长，额定温度高，安全可靠等特点。

◆ **产品用途**：广泛应用于并联补偿型的各式管式荧光灯和金属卤化物灯具。

◆ **主要技术参数**：

**额定电压**：110V.AC-600V.AC

**容量偏差**：±3%、±5%、±10%

**损耗角正切值**：tg δ ≤0.0025(100Hz)

**极间耐压**：2Un/5s

**极壳耐压**：2000V.AC or 2Un+1000VAC

**产品认证**：UL、CUL

**稳态过电压**：允许1.1Un下长期运行

**稳态过电流**：允许1.3In下长期运行

**优选气候类别**：40/70/21 40/85/21 40/105/21

**安全等级**：P0

**Reference Standard**:Meet the requirements of standard 《IEC:60252-1-2011》《UL810-2008》《GB3667.1-2005》

**Product Characteristic**:Small size, small inherent temperature rise, long life, high rated temperature, usage safety and dependable.

**Application**:They are widely used for fluorescent lamps and halogen lamps.

**Technical Specification**:

**Rated Voltage**:110V.AC-600V.AC

**Capacitance Tolerance**: ±3%、±5%、±10%

**Dissipation factor**:tg δ ≤0.0025(100Hz)

**Voltage Proof (Vt-t)**:2Un/5s

**Voltage Proof(Vt-c)**:2000V.AC or 2Un+1000VAC

**Product Certificates**:UL、CUL

**Steady state overvoltage**:

Permit long term of operation under 1.1Un

**Steady state overcurrent**:

Permit long term of operation under 1.3In

**Climate Category**:40/70/21 40/85/21 40/105/21

**Safety Class**:P0

◆CBB80型号常用规格表：（见附表）

### CBB80灯具电容器规格表

#### Type CBB80 Lighting capacitor specification sheet

容量 尺寸	电压 Voltage											
	180VAC		240VAC		280VAC		330VAC		400VAC		525VAC	
容量 Capacitance	D	H	D	H	D	H	D	H	D	H	D	H
5	26	53	26	53	30	50	30	60	30	60	35	71
6	26	53	26	53	30	50	30	60	35	60.5	40	68
7	26	53	30	50	30	60	35	60.5	35	60.5	40	68
8	26	53	30	50	30	60	35	60.5	35	71	45	75
10	26	53	30	50	35	60.5	35	71	40	68	45	75
11	30	50	30	60	35	60.5	35	71	40	68	50	80
12	30	50	30	60	35	60.5	40	68	40	68	50	80
14	30	50	35	60.5	35	71	40	68	40	80	50	100
16	30	60	35	60.5	35	71	40	68	40	93	50	100
18	30	60	35	60.5	40	68	40	80	40	93	50	100
20	35	60.5	35	71	40	68	40	93	45	85	50	120
22	35	60.5	35	71	40	68	40	93	45	93	50	120
24	35	60.5	35	71	40	80	40	93	45	93	50	120
26	35	60.5	40	68	40	80	45	85	50	100	60	100
28	35	71	40	68	45	85	45	93	50	100	60	100
30	35	71	40	68	45	85	45	93	50	100	60	100
32	35	71	40	68	45	85	45	93	50	100	60	120
34	35	71	40	80	45	85	50	100	50	100	60	120
36	35	71	40	80	45	85	50	100	50	110	60	120
38	40	68	40	80	45	93	50	100	50	110	60	120
40	40	68	45	85	45	93	50	100	50	120	60	120

◆特殊要求可根据用户要求协商制作。Special requirement can be fulfilled at the request of customers.